

LED FIXTURE

SSL Series



LED Glass Wall Pack SSL-WP1T

Glass lens, 120-347V auto-sensing driver
Multiple wattage and multiple kelvin selection



5-year limited warranty


Operating temperature range -40° C ~ +40° C



Features & Benefits

- cULus listed, DLC Premium
- 120-347V auto sensing driver, 0-10V dimming
- Switchable CCT (30K/40K/50K), switchable wattage
- Junction box or wall mounted directly
- Die-cast aluminum with durable dark bronze coat finish
- Photocell sensor optional
- L70 @ 50,000 Hrs, CRI≥80
- IP 65, wet location rated

Dimensional Drawing

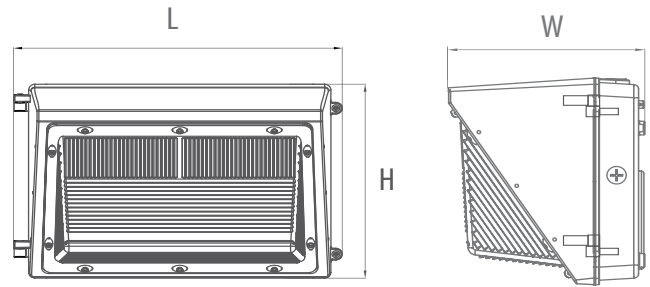

Ordering Information Example: SSL-WP1T/60M/MW/MK/120-347V/D/DB

Family Name	Fixture Type	Type	Wattage	CCT	Voltage	Dimmable	Finish	Options
SSL (Solid state lighting)	WP1T (LED glass wall pack)	60M (Max. 60W) 100L (Max. 100W)	MW (Multi Wattage)	MK (Multi Kelvin/CCT)	120-347V	D (Dimmable)	DB (Dark bronze)	Photocell

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3680304	Y	SSL-WP1T/60M/MW/MK/120-347V/D/DB	60-40-28	120-347V	50,000	7200-4800-3360	30-40-50	≥80	Yes	14.3"x 9"x 7.8"	2
3680305	Y	SSL-WP1T/100L/MW/MK/120-347V/D/DB	100-90-80-70	120-347V	50,000	12000-10800-9600-8400	30-40-50	≥80	Yes	14.3"x 9"x 7.8"	2
3660183	-	SSL-WP2T/LV/12V/PC	SSL, Low Voltage, 12V, Photocell (Button Type)								

SSL-WP2T/LV/12V/PC

