

LED FIXTURE

SSL Series



LED Adjustable Wall Pack SSL-WP2T

Adjustable slim wall pack, 120-347V auto-sensing driver
Multiple wattage and multiple kelvin selection



5-year limited warranty


Operating temperature range -40° C ~ +50° C



Features & Benefits

- cULus listed, DLC Premium
- Efficacy >130LPW, PF>0.9, 0-10V dimming
- Switchable CCT (30K/40K/50K), switchable wattage
- Type III light distribution
- Die-cast aluminum with durable dark bronze coat finish
- Motion sensor, photocell, and emergency battery driver optional
- L70 @ 50,000 Hrs, CRI≥70
- IP 65, wet location rated

Dimensional Drawing

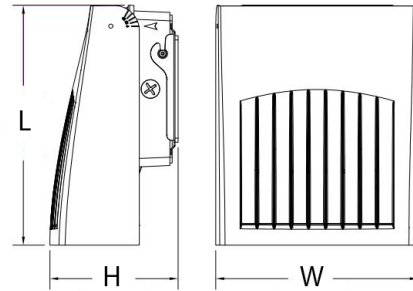

Ordering Information Example: SSL-WP2T/30M/MW/MK/120-347V/D/DB

Family Name	Fixture Type	Type	Wattage	CCT	Voltage	Dimmable	Finish	Options
SSL (Solid state lighting)	WP2T (LED adjustable wall pack)	30M (Max. 30W medium size) 75L (Max. 75W large size)	MW (Multi Wattage)	MK (Multi Kelvin/CCT)	120-347V	D (Dimmable)	DB (Dark bronze)	Motion sensor Photocell Emergency battery driver

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3680308	Y	SSL-WP2T/30M/MW/MK/120-347V/D/DB	30-24-20-15	120-347V	50,000	3900-3120-2600-1950	30-40-50	≥70	Yes	7.8" x 4.9" x 6.6"	4
3680309	Y	SSL-WP2T/75L/MW/MK/120-347V/D/DB	75-60-50-40	120-347V	50,000	9750-7800-6500-5200	30-40-50	≥70	Yes	11.3" x 6" x 9.5"	2
3660183	-	SSL-WP2T/LV/12V/PC	SSL WP2T adjustable wall pack, low voltage, 12V, photocell (button type)								
3660184	-	SSL-WP2T/EM/120-347V	SSL WP2T adjustable wall pack, emergency battery driver, 120-347V, 9W, 90 minute								
3660185	-	SSL-WP2T/EM/B-BOX	SSL WP2T adjustable wall pack, emergency battery driver back-box. (must be ordered for above option)								
3660186	-	SSL-WP2T/LV/12V/SENSOR	SSL WP2T adjustable wall pack, low voltage, 12V, microwave sensor, Max. Mtg 15m								
3660187	-	SSL-WP2T/LV/12V/SENSOR/B-BOX	SSL WP2T adjustable wall pack, low voltage, 12V, microwave sensor back-box. (must be ordered for above option)								

SSL-WP2T/LV/12V/PC



SSL-WP2T/LV/12V/SENSOR



SSL-WP2T/EM/120-347V

