



LED FIXTURE

RIGID Series

LED Slim Panel PRO-SP3

Slim design allows it to be installed in low plenum ceilings.



Features & Benefits

- Multi-Kelvin (CCT) selectable, 30-40-50K
- Type IC Rated – approved for direct contact with insulation, FT4 rated cable
- Isolated internal driver in junction box – fast and easy to install
- Finish colour white, interchangeable trim ring for black or brushed nickel finish
- PC lens aluminium body, 120° beam angle

- Energy Star approved, Wet location rated
- L70 @ 50000 Hrs, High CRI (80+)
- Dimmable Triac down to 10%
- PL-AMP-MULTI-V mounting plate ordered separately



Warranty

- 3-year limited warranty
- Operating temperature range between -20°C and +40°C

Applications

Residential / Commercial, Schools, Retirement Homes, University, Supermarkets, Shops, Hotels, Conference Rooms, Office Lighting, Show Room, Corridor, Kitchens etc.

Dimensional drawing

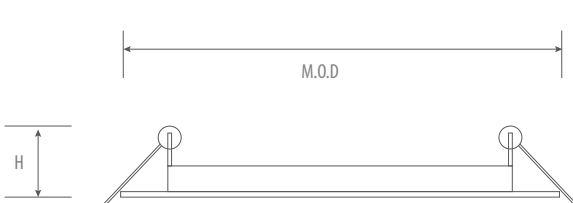

M.O.D	Cut-Out	H
4.92"	4.25"	0.96"

Ordering Information Example: PRO-SP3/4/8W/MK/120/WH/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Finish Color	Dimmable	Options
PRO	SP3 (Slim Panel)	4 (4")	8W	MK (Multiple CCT, 30K/40K/50K Switchable)	120 (120V)	WH (White)	TRIAC Dimming	Black Trim Ring Brush Nickel Trim Ring (Sold seperately)

Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating(Hrs)	Initial Delivered Lumens (lumen)	CCT (K)	CRI	M.O.D (inch)	Case QTY.
3662158	Yes	PRO-SP3/4/8W/MK/120/WH/D	8W	120V	50,000	750	30-40-50K	≥80	4.92"	50
3660094		RGD-SP/4/CCT/BK							4.92"	
3660095		RGD-SP/4/CCT/BN							4.92"	