

WLFLS-1W

1.2W LED Wall Graze Light, Square
Recessed Lighting

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

Features

Body Construction

The body is constructed from machined aluminum which acts as a heat sink for the 1.2W LED. Fixture can be rotated 360° to a fixed position for directional wall grazing. Provided with toolless push in connector allows for daisy chain option, to be used with 18-2 AWG LVT cable (not provided). Suitable for indoor use only, dry and damp locations.

Housing

The LED wall graze light is installed in an aluminum housing which allow for enclosed wiring and the fixture to be installed where insulation is present. Housing includes a strain relief to secure electrical cables and two torsion clips for enhanced rigidity to recessed surface.

Power Consumption

This fixture operate on 24V constant voltage. Remote power supply required (See back for driver options).

Voltage Drop

Contact your Liteline representative for voltage drop calculation guidelines.

Light Output

This recessed light outputs a warm white (3000 K) colour temperature which provides 62 lumens.

Beam Spread

The fixture LED provides lighting with 120 degree beam spread.

Dimming

100%-5% dimming with compatible electronic and magnetic dimming drivers.

Installation

When installing WLFLS-1W in an insulated wall a vapour barrier (WL-VBE sold separately) and a pre-mounting plate (P-1750 sold separately) is required.

Applications


With the added directional control, this allows for multiple corridor/hallway sidewall recess lighting, in addition adding essential accent illumination for under cabinet, display and wall washing environments.

SPECIFICATION	
Approved Location	Damp
Beam Angle	120°
CCT	3000 K
Certification	cETLus
CRI	90+
Cut-hole	1 3/4" (44mm)
Dimming	Yes
Insulation Contact	Yes
Lumen	62
Lumens per Watt	51
Material	Aluminum
Max. Temp.	40°C
Min. Start Temp.	-20°C
Power Supply Type	Constant Voltage
Primary Voltage	24
Projected Life	35,000 hrs
Warranty	3 Years
Watt	1.2W



Description

This 1.2W LED wall graze light provides quality illumination for ambient accent lighting in hallways, corridors, stairs and entrances. Powered by a 24V constant voltage power supply (sold separately). Fixture is IC rated, suitable for indoor use only.

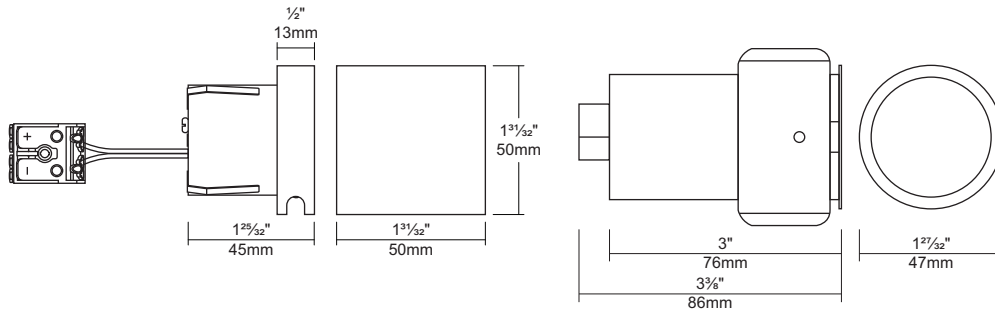



Notes: Accessories should be ordered separately. For additional options please consult your Liteline representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Ordering Guide

- 
WLFLS-1W30K-90-ABK
LED Flood Square Wall Light, Anodized Black, 1.2W, 120° beam spread, 3000 K, 90+ CRI.
- 
WLFLS-1W30K-90-AL
LED Flood Square Wall Light, Brushed Aluminum, 1.2W, 120° beam spread, 3000 K, 90+ CRI.
- 
WLFLS-1W30K-90-FWH
LED Flood Square Wall Light, Flat White, 1.2W, 120° beam spread, 3000 K, 90+ CRI.

Accessories

- 
WL-VBE
LED Wall Light Vapour Barrier.
- 
P-1750
1 3/4" LED Wall Light Pre-mounting Plate.

Compatible Drivers

Non Dimming Class II

Hardwire Drivers

**LED-HWB-24V-24W**

LED 24V, 24W Hardwire Box LED Driver with DC 2.1 jack.

LED-HWB-24V-36W

LED 24V, 36W Hard wire Box LED Driver with DC 2.1 jack.

LED-HWB-24V-60W

LED 24V, 60W Hard wire Box LED Driver with DC 2.1 jack.

Power feed required**LED-HWB-DC21-6-PF**

DC 2.1 to bare leads power feed. Maximum 10' to first fixture.

* Power feed required for all drivers with DC 2.1 jack.

Dimming Class II

Electronic Hardwire Drivers – DC 2.1 – Powered by Lutron®

**LED-HWB-DC21-6-PF**

DC 2.1 to bare leads power feed. Maximum 10' to first fixture.

LED-HWBDC21-24-40

40W LED dimmable hardwire driver with DC 2.1 jack. 2-wire, 24V, powered by Lutron® Hi-Lume® 1% 2-wire 120V LED driver.

LED-HWBDC21-24-40

40W LED dimmable hardwire driver with DC 2.1 jack. 3-wire, 24V, powered by Lutron® Hi-Lume® 1% Ecosystem/3-wire LED driver.

Electronic Hardwire Drivers – Hardwire

**HWB-DIM-EDC-24V-25W**

25W dimmable electronic hardwire driver, 24V.

**HWB-DIM-EDC-24V-50W**

50W dimmable electronic hardwire driver, 24V.

**HWB-DIM-EDC-24V-96W**

96W dimmable electronic hardwire driver, 24V.

Power feed required**LED-HWB-DC21-6-PF**

DC 2.1 to bare leads power feed. Maximum 10' to first fixture.

* Power feed required for all drivers with DC 2.1 jack.

Magnetic Indoor/Outdoor Hardwire Drivers

**HWB-DIM-MDC-24V-20W**

20W LED magnetic dimmable hardwire driver, 24V.

HWB-DIM-MDC-24V-40W

40W LED magnetic dimmable hardwire driver, 24V.

HWB-DIM-MDC-24V-60W

60W LED magnetic dimmable hardwire driver, 24V.

HWB-DIM-MDC-24V-96W

96W LED magnetic dimmable hardwire driver, 24V.

**HWB-DIM-MDC-24V-192W**

192W LED magnetic dimmable hardwire driver, 24V.

Wiring Diagram

